

ROLL-OFF DUMP TRAILER

14RD/14RB & 16RD/16RB



Here at Big Tex, we're rolling out an innovative lineup of 4 new Roll-Off Dump Trailers, complete with the most requested features to support the demands of the construction, junk removal, and even the dumpster rental business. These new workhorses are built with professional-grade parts and are specially designed to withstand the rigors of everyday use. From their durable and strong I-beam frame design and scissor-hoist lifting system to an industry-leading High-Duty Cycle 15,000# Winch, these trailers offer a convenient and cost-effective solution for servicing multiple job sites with a single trailer.

BigTex
TRAILERS®

www.bigtextrailers.com/dump-trailers

14RD | GOOSENECK ROLL-OFF DUMP TRAILER

GVWR: 15,900# | lbs EMPTY WEIGHT: 6,040# | AVAILABLE LENGTHS: 14' | BED WIDTH: 102" WIDE | COUPLER: Gooseneck with 2-5/16" Adjustable Pipe Coupler

BigTex TRAILERS®

www.bigtextrailers.com/dump-trailers


14RD | GOOSENECK
ROLL-OFF DUMP TRAILER
15,900# GVWR

14RB | BUMPER PULL
ROLL-OFF DUMP TRAILER
14,000# GVWR

16RD | GOOSENECK
ROLL-OFF DUMP TRAILER
17,500# GVWR

16RB | BUMPER PULL
ROLL-OFF DUMP TRAILER
17,500# GVWR

13BN | ROLL-OFF DUMP BIN
(SOLD SEPARATELY)
13 Cubic-Yard Capacity

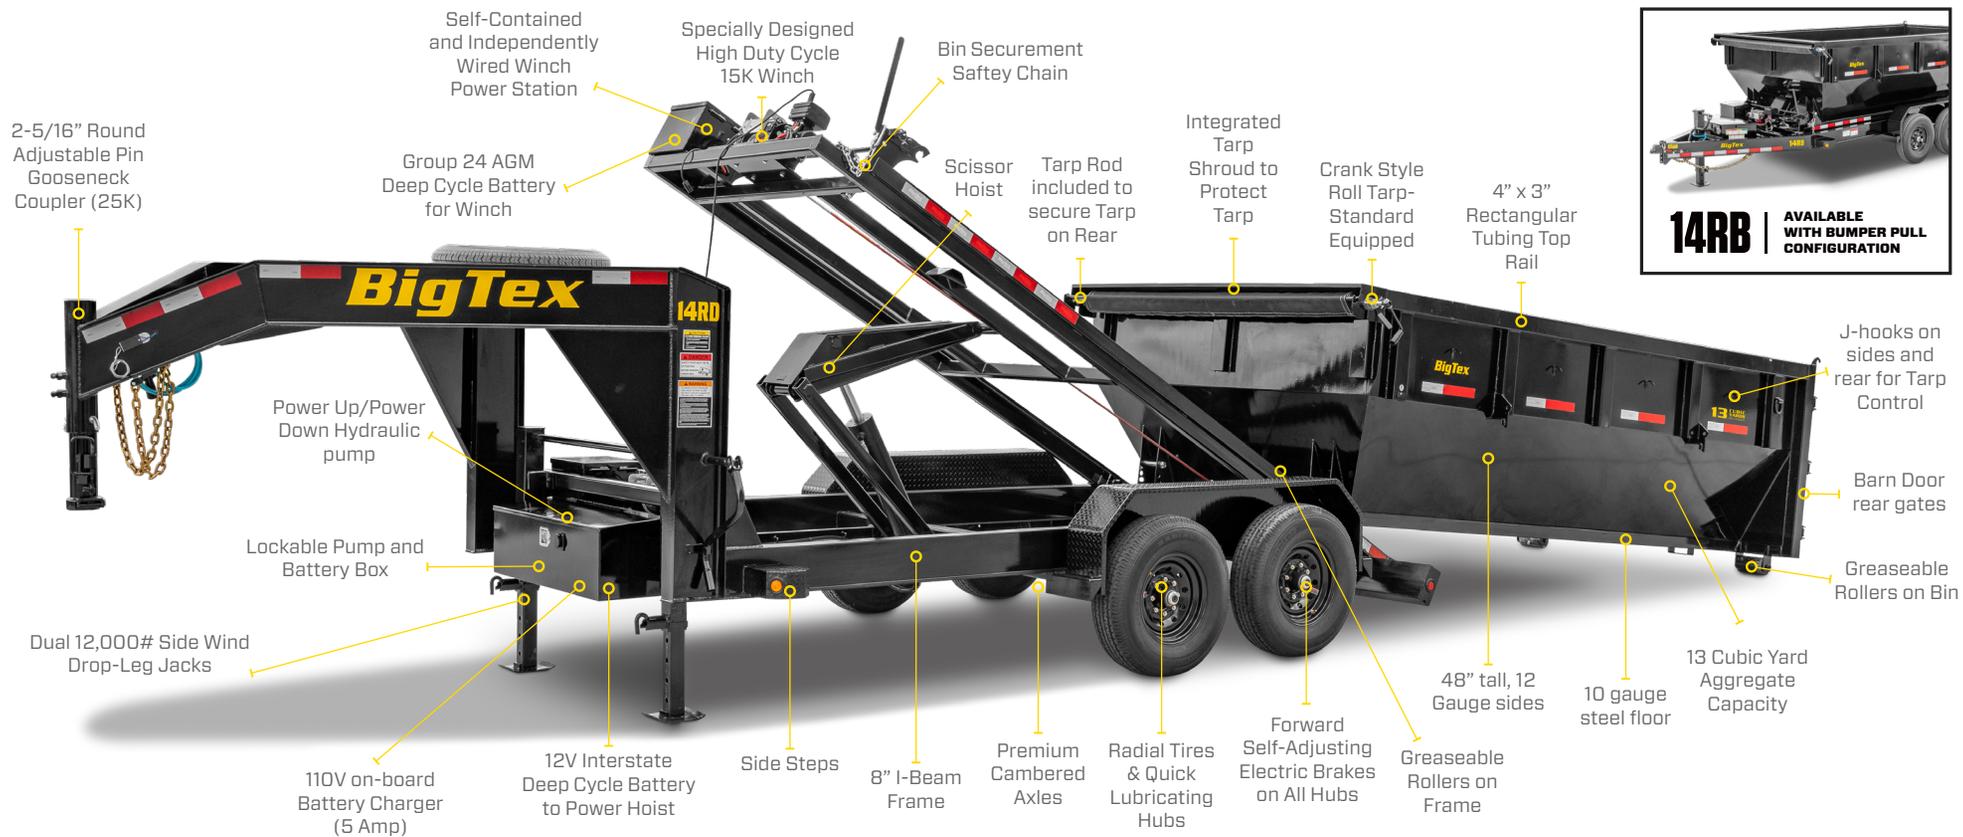

THE RIGHT TOOL FOR THE JOB

Unlike some competitive products, the Big Tex Roll-Off Dumps are equipped with a High-Duty Cycle ComeUp Winch designed for longevity and multiple cycles each day.



HEAVY DUTY 10-GAUGE, 4' SIDES

Our Roll-Off dump bins are built tough with durable 10-gauge steel. Plus, our taller 4' side height helps keep loose materials off the road and in the bin where they belong.



SERVICE MULTIPLE JOBS WITH A SINGLE TRAILER

You can't be everywhere at once, but thanks to our innovative Roll-Off design, your dump bins can! Quickly and easily service multiple job sites by adding additional dump bins to your fleet anytime.

14RD

GOOSENECK ROLL-OFF DUMP TRAILER

 GVWR: 15,900#
  EMPTY WEIGHT: 6,040#
  AVAILABLE LENGTHS: 14'
  BED WIDTH: 102" WIDE
  COUPLER: Gooseneck with 2-5/16" Adjustable Pipe Coupler

BigTex

TRAILERS®

www.bigtextrailers.com/dump-trailers

SPECIFICATIONS

	14RD	14RB	16RD	16RB
HITCH TYPE	Gooseneck	Bumper Pull	Gooseneck	Bumper Pull
G.V.W.R.	15,900#	14,000#	17,500#	17,500#
G.A.W.R. (Ea. Axle)	7,000#	7,000#	8,000#	8,000#
HYDRAULICS	Power Up/Power Down	Power Up/Power Down	Power Up/Power Down	Power Up/Power Down
COUPLER	2-5/16" Round Adj. Pin (25K)	Adjustable 2-5/16" Demco EZ Latch	2-5/16" Round Adj. Pin (25K)	Adjustable 2-5/16" Demco EZ Latch
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2ea)			
JACK	Dual 12,000# Drop Leg- Side Wind	12,000# Side Wind Drop Leg	Dual 12,000# Drop Leg- Side Wind	12,000# Side Wind Drop Leg
NECK/TONGUE	10" I-Beam	Integral with Frame (8" I-Beam, 10#)	10" I-Beam	Integral with Frame (8" I-Beam, 10#)
MAIN FRAME	8" I-Beam, 10#	8" I-Beam, 10#	8" I-Beam, 10#	8" I-Beam, 10#
DUMP BODY CRMS	3" Channel, 16" Centers			
DUMP BODY SIDES	48" Tall	48" Tall	48" Tall	48" Tall
DUMP BODY TOP RAIL	4" x 3" Rectangular Tubing			
FENDERS	10" x 72" 14 Ga. Diamond Plate Double Square Broke	10" x 72" 14 Ga. Diamond Plate Double Square Broke	10" x 72" 14 Ga. Diamond Plate Double Square Broke	10" x 72" 14 Ga. Diamond Plate Double Square Broke
AXLE	(2) 7,000# Axles w/ Quick Lubricating Hubs & Elec. Brakes	(2) 7,000# Axles w/ Quick Lubricating Hubs & Elec. Brakes	(2) 8,000# Axles Oil Bath w/ Electric Brakes	(2) 8,000# Axles Oil Bath w/ Electric Brakes
SUSPENSION	Multi-Leaf Slipper Spring w/ Equalizer			
TIRE	ST235/80 R-16 Load Range E	ST235/80 R-16 Load Range E	ST215/75 R-17.5 Load Range H	ST215/75 R-17.5 Load Range H
WHEEL	16" x 6"; Black Mod, 8 Bolt	16" x 6"; Black Mod, 8 Bolt	17.5" x 6.75"; Black Mod, 8 Bolt	17.5" x 6.75"; Black Mod, 8 Bolt
FLOOR	10 Gauge Smooth Steel			
LIGHTS	L.E.D. Stop, Turn, and Tail Clearance			
ELEC. PLUG	7-way RV	7-way RV	7-way RV	7-way RV
FINISH (PREP)	Steel is Cleaned to Ensure a Professional, Smooth Finish.	Steel is Cleaned to Ensure a Professional, Smooth Finish.	Steel is Cleaned to Ensure a Professional, Smooth Finish.	Steel is Cleaned to Ensure a Professional, Smooth Finish.
FINISH	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.

OPTIONAL EQUIPMENT

Category	Code	Description
COUPLER	AP	Adjustable Pintle in Channel ILO Coupler
JACKS	12KHJ	12,000# Elec/Hyd. Jack BY Stillwell™
TIRE/WHEEL	SP	Spare Tire (ST235/80 R-16 LR-E)
TIRE/WHEEL	TU	Tire Upgrade (ST235/80 R-16 LR-G)
TIRE/WHEEL	SPU	Spare Tire Upgrade (ST235/80 R-16 LR-G)
POWER	WRMT	Wireless Remote for Hoist

WEIGHTS & CAPACITIES

	14RD	14RB	16RD	16RB
LENGTH	14'	14'	14'	14'
EMPTY WEIGHT	6,040#	5,590#	6,040#	5,590#
PAYLOAD	9,860#	8,410#	11,460#	11,910#
BOX CAPACITY	13 Cubic Yards	13 Cubic Yards	13 Cubic Yards	13 Cubic Yards

**All Weights include Bin*